




# DC Brushless Water Pump


Miniaturowa bezszczotkowa pompa obiegowa FOTTON FT-A38 ZR 24V DC

” Product Parameter								
Model			FOTTON FT-A38 24V DC ZR					
Character								
Max working voltage			24VDC					
Rated working voltage			12VDC/24VDC					
Rated power			18W/25W					
Hmax (Max static water head)			4meters / 7 meters					
Qmax (Max static flow rate)			6L/min / 11 L/min					
Lifespan			Continuous operation under normal working surrounding 20000H					
Working Environment			PH value: PH5-10(weak acid and weak base), workable both on land, NON submersible					
Max noise			Under normal working condition,(1meter over the test instrument) 35dB					
Max working temperature			Under room temperature surroundings, fluid medium temperature 70C°					
Application			Mobile bath machine, water dispenser, electric refrigerator, foot massage, medical treatment equipment, cold therapy, hot compress, air conditioner and fans, smart gaden herbs, hydroponics, plant&flowers watering, computer cooling, fountain, aquarium, water tank, fish pond, irrigation, solar water circulation, water circulation of home appliance, crafts, etc.					
Color			White/Black (Can be customized according to customer`s requirement)					
Outlet direction			Can be adjustable at any angle					
Dimension			IP grade	Inlet		Outlet		Remarks
Length ^ mmV	Width ^ mmV	Height ^ mmV		OD^ mmV	ID^ mmV	OD^ mmV	ID^ mmV	
76.8	42.3	54.5	IP67	12.5	10.0	8.8	6.0	Inlet has footgrip.

## Outside View

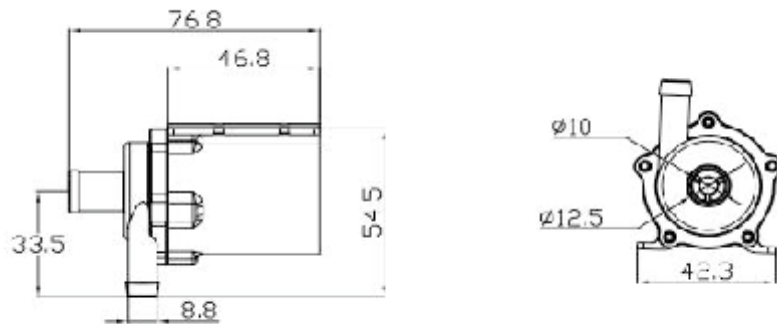

## Curve Graph

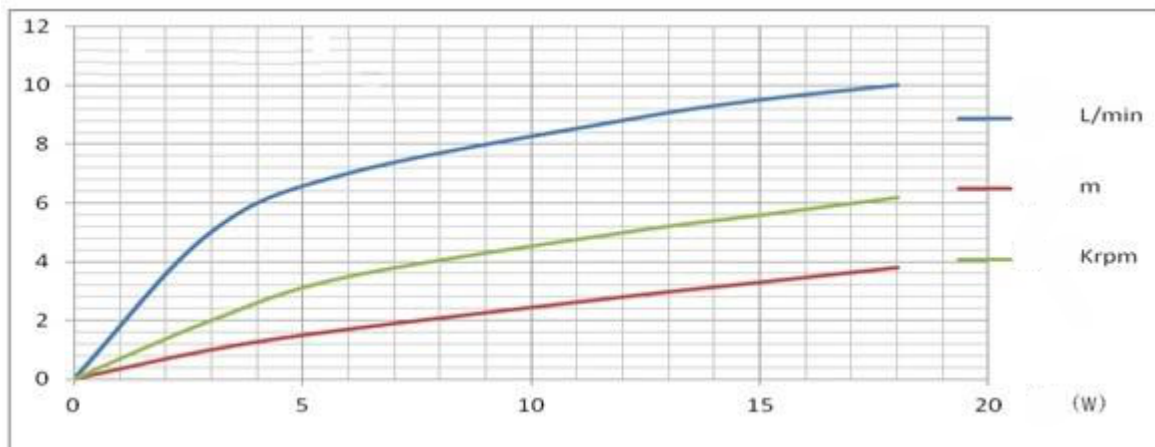

## Photo

